


COLUMN TRAVEL MILLING and BORING CENTER

WINGTRAX-U WINGTRAX-H



- X Longitudinal 12000, Y Vertical 4000, Z Cross 1250
- W Boring spindle 800mm, ϕ 160mm

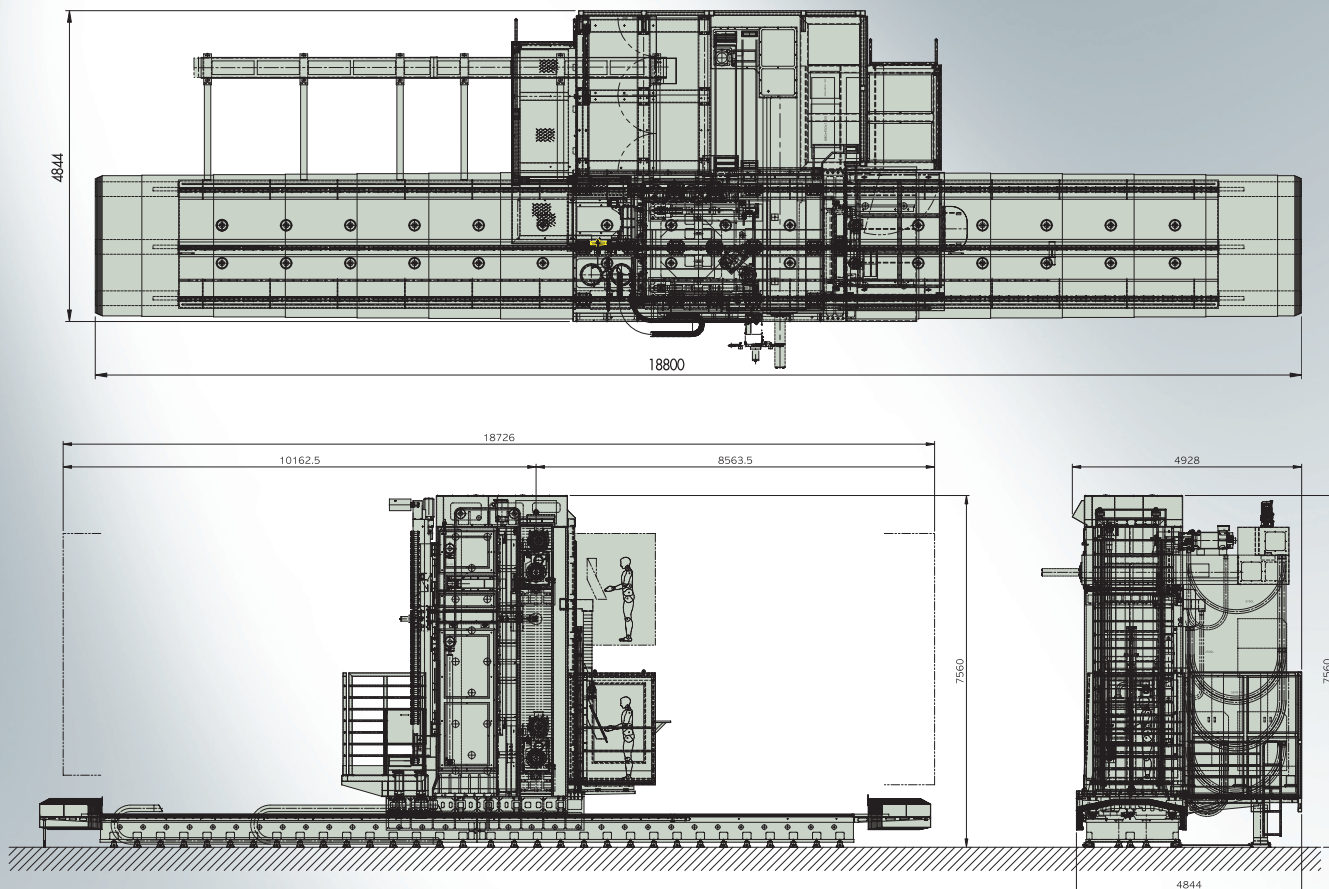

SPECIFICATION		Unit	WiNGTRAX
Travel	X axis	mm	6000 ~ 20000 (increase by 1000)
	Y axis	mm	4000 ~ 6500 (increase by 500)
	Z axis	mm	1250 / 1600
	W axis	mm	800 / 1000
Spindle speed		rpm	2000
Boring spindle diameter		mm	ϕ 160 / ϕ 180
Spindle motor		kw	60 / 84 (continuous / 30min)
Rapid feedrate	X axis	mm/min	20000
	Y axis	mm/min	16000
	Z axis	mm/min	16000
	W axis	mm/min	10000
Feedrate	X, Y, Z axis	mm/min	10000
ATC		ea	90 (30, 40, 50, 60, 90)
Machine weight		ton	120